


2022


Design Of Groyne



Student : nadeen sabeeh abood
ADVANCE Hydraulic structure Report
12/5/2022

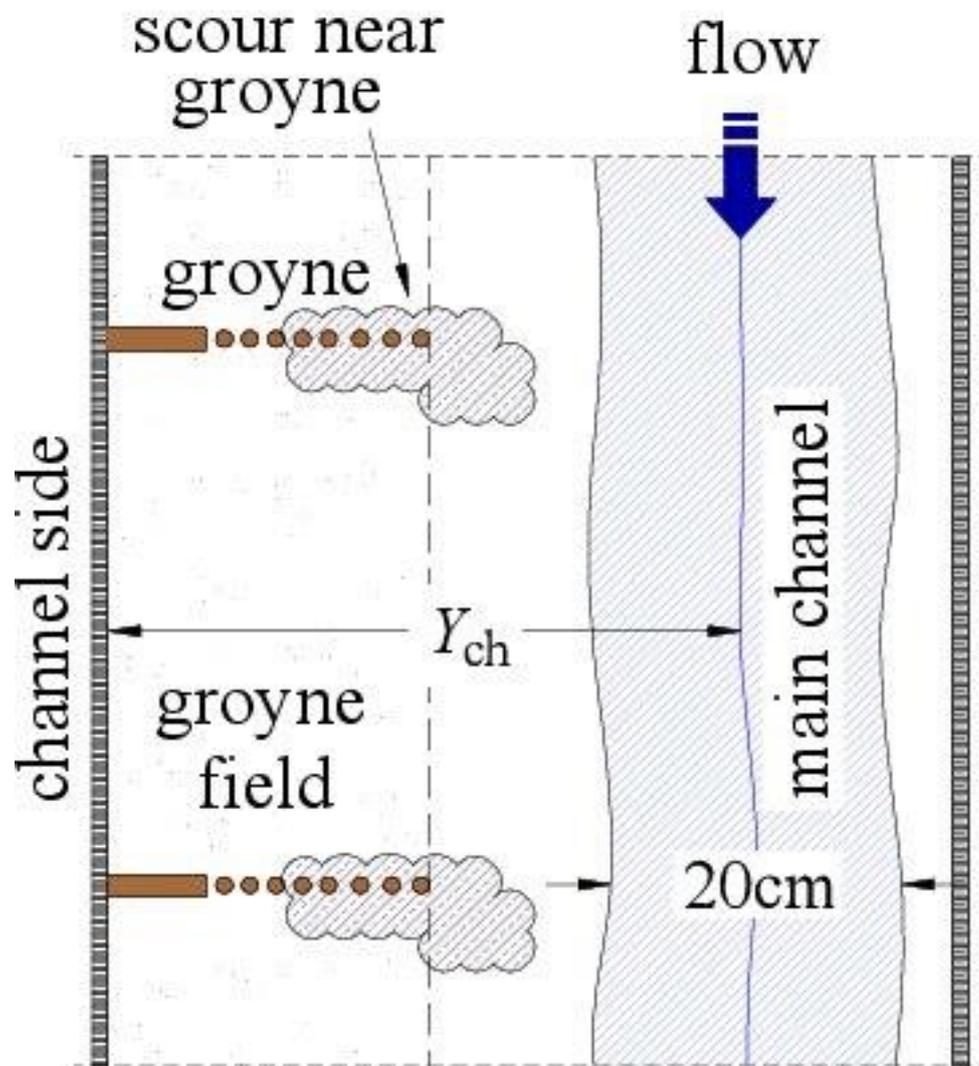

Plan view

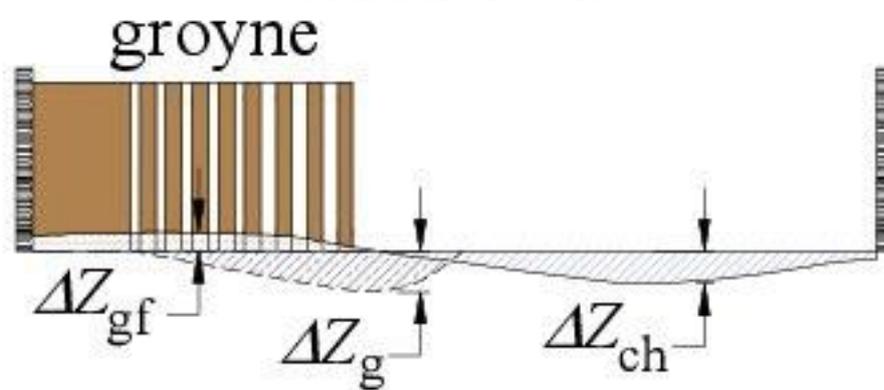

Cross-section

Design Of Groyne

Introduction

the groynes are impervious permanent structures constructed on the curve of a river to protect the river bank from erosion. They extend from the bank towards the bed by making an angle 46° to 75° with the bank.

The angle may be towards the upstream or downstream. Sometimes, it is made perpendicular to the river hank. These are constructed with rubble masonry in the trapezoidal section and the surface is finished with stone pitching or concrete blocks.

- The stone pitching or the concrete blocks are set with rich cement mortar.
- The length of the groyne depends on the width and nature of the river.
- The top width varies from 3 m to 4 m. The side slope may be $1\frac{1}{2} : 1$ or $2 : 1$.
- The groynes are provided in series throughout the affected length of the river hank.
- The spacing between the adjacent groynes is generally kept as $2L$, where L is the length of the groyne.
- These are recommended for the river where the permanent solution of erosion control is extremely necessary.

➤ Classification of Groynes

Groynes are classified into different types based on different factors which are as follows :

- Materials used for construction
- Permeability characteristics
- Height of groynes
- Function of groynes

➤ Types of Groynes based on Materials Used for Construction

Based on the materials used in construction, the groynes are classified into :

1. Wood groynes
2. Sandbag groynes
3. Rock groynes
4. Concrete groynes
5. Sheet pile groynes
6. Rubble-mound groynes

1. Wood groynes

Wooden groynes are built with timber piles. Generally, single row or double row wooden groynes are constructed as they suffice the requirement. The durability of wooden groynes is very low but they are economical and useful for short term purposes.



Fig 1: Wooden Groyne

2. Sandbag Groynes

Sandbag groynes are constructed using sand or earth-filled bags which are stacked in the form of barrier. They are used for temporary or short-term purposes. To prevent the sinking of sandbags into the ground, a special type of filter cloth is provided under the bags.



Fig 2: Sandbag Groyne

3. Rock Groynes

Rock groynes, constructed using large sized rocks have more durability compared to other materials. They absorb a good amount of wave energy and maintain a good stability in any situation.



Fig 3: Rock Groyne

4. Concrete Groynes

Concrete groynes are constructed using reinforced concrete or pre-fabricated concrete blocks. These are the most stable and durable structures. Good foundation and appropriate soil conditions are required to construct concrete groynes.



Fig 4: Concrete Groyne

5. Sheet pile Groynes

Sheet pile groynes are constructed using steel sheet piles. The sheets pile groynes constructed are either single sheet pile or double sheet pile.

However, double sheet pile walls are more durable and stable.



Fig 5: Sheet Pile Groyne

6. Rubble-mound Groynes

Rubble-mound groynes are widely used structures along the seashores. They are built using stones or specially made concrete units such as tetrapods. To attain more strength, sheet piling is provided inside the rubble-mound groynes.

Durability and stability of rubble-mound groynes are very high.



Fig 6: Rubble Mound Groyne

➤ Types of Groynes based on Permeability Characteristics

1. Permeable groynes
2. Impermeable groynes

1. Permeable groynes

Permeable groynes permit water through it but with a reduced velocity of flow. Groynes built using wood, sandbags etc. come under this category. This type of groyne is suitable when a river is carrying a certain amount of sediment in suspension.

2. Impermeable groynes

Impermeable groynes do not permit water to flow through them. They are made of rock, gavel, gabions etc. Since they are impermeable, the water may overflow during peak conditions hence, a thick protection layer is necessary for this type of groynes.

➤ Types of Groynes based on Height

1. Submerged groynes
2. Non-submerged groynes

1. Submerged groynes

Submerged groynes are constructed where river depth is very deep. Their submergence condition varies according to the water surface level in the river. Permeable materials are used to construct this type of groynes and they reduce flow velocity that results in preventing erosion of the top portion of the groyne.



Fig 7: Submerged Groyne

2. Non-submerged groynes

Non-submerged groynes are constructed with a height greater than maximum flood level. They are generally built using impermeable materials.



Fig 8: Non Submerged Groyne

➤ Types of Groynes based on functions

1. Attracting groynes
2. Repelling groynes
3. Deflecting groynes
4. Sediment groynes

1. Attracting groynes

Attracting groynes are constructed in such a way that their head is pointing towards the downstream side of the river as shown in the figure below. They are built with an angle of 45 to 60 degrees with the bank. Since it is inclined towards downstream, the water-flow will attract towards the bank on which groyne is located.

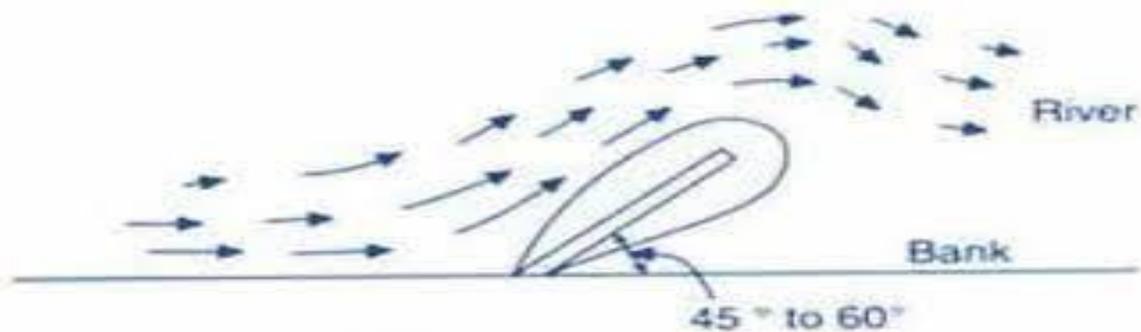


Fig 9: Attracting Groyne

Upstream side of attracting groynes undergoes severe attack by water flow hence, it should be constructed with proper protection. They provide safety to the opposite bank but adjacent banks may get affected by this type of groynes. Silting is also not possible in this type of groyne. Hence, these are not recommended.

2. Repelling groynes

Repelling groynes are built with their head towards upstream with an inclination of 60 to 80 degrees with the bank. They repel the water-flow towards the bank on which it is located.

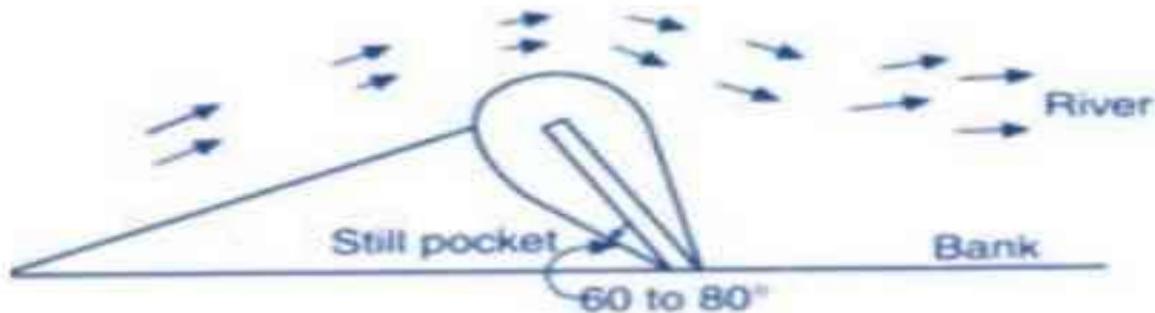


Fig 10: Repelling Groyne

The head portion of repelling groynes is under the main attack by the flow. Hence, it should be built with strong protection. The sediments carried by the water gets deposited in the silt pocket which is formed at the upstream side of repelling groyne. These groynes are more advantageous than attracting groynes and are used widely for river training and bank protection.

3. Deflecting groynes

Deflecting groynes are built perpendicular to the bank and they just deflect the water-flow without repelling and provide local protection to the banks.

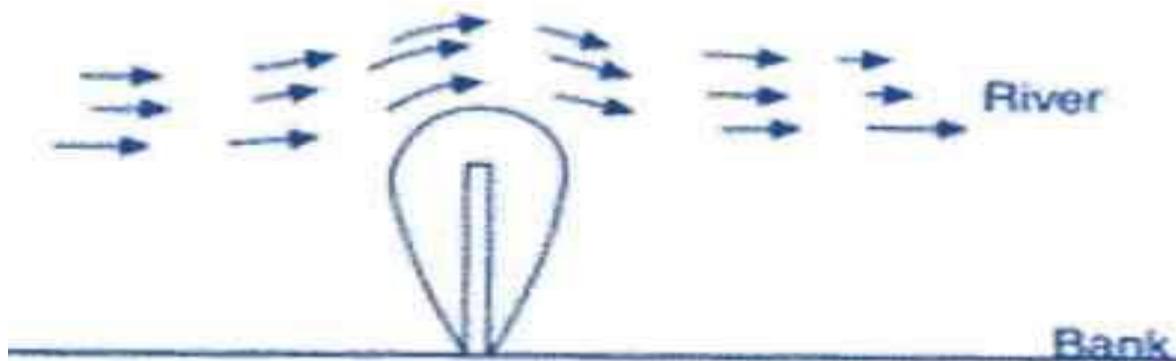


Fig 11: Deflecting Groyne

4. Sediment groynes

Sediment groynes are constructed when there is a considerable amount of sediments carried by the river water. These reduce the stream velocity and allow the sediments to deposit. They do not repel or deflect the flow. Generally, permeable groynes are used as sediment groynes.



Fig 12: Groynes along River Bank

➤ Effect of groynes on the shoreline

The groyne design (planform, length, height, cross-shore profile, inclination) influences the impact on shore morphology; the impact also depends on sea water level, wave climate and sediment supply in the surf zone.

Protection of the shore by use of a single groyne is most often inefficient. Therefore, shore protection by groynes is generally designed as a group comprising from a few to tens of individual structures (see Groynes as shore protection).

A scheme of interacting groynes is shown in (Figure13). Whereas a single groyne produces coastal erosion on the lee side of the structure, erosion in the case of a group of groynes is shifted to the lee side of the whole system. Erosion is also observed in the direct vicinity of the structures, particularly when the dominant wave direction is perpendicular to the shore. Water accumulation between the groynes induces compensating flows along the structures, causing local erosion of the seabed and sand loss to deep water^[1]. During severe storms the groynes are “short” compared to the surf zone width, with erosion occurring around them. Under mild wave conditions groynes become “long” (length comparable to the surf zone width), thus favouring updrift sand accumulation and widening of the beach. Loss of contact between a groyne and the shore should be avoided. In such a case, longshore flows are generated between the shoreline and the groyne root. These flows cause washing out of the beach.

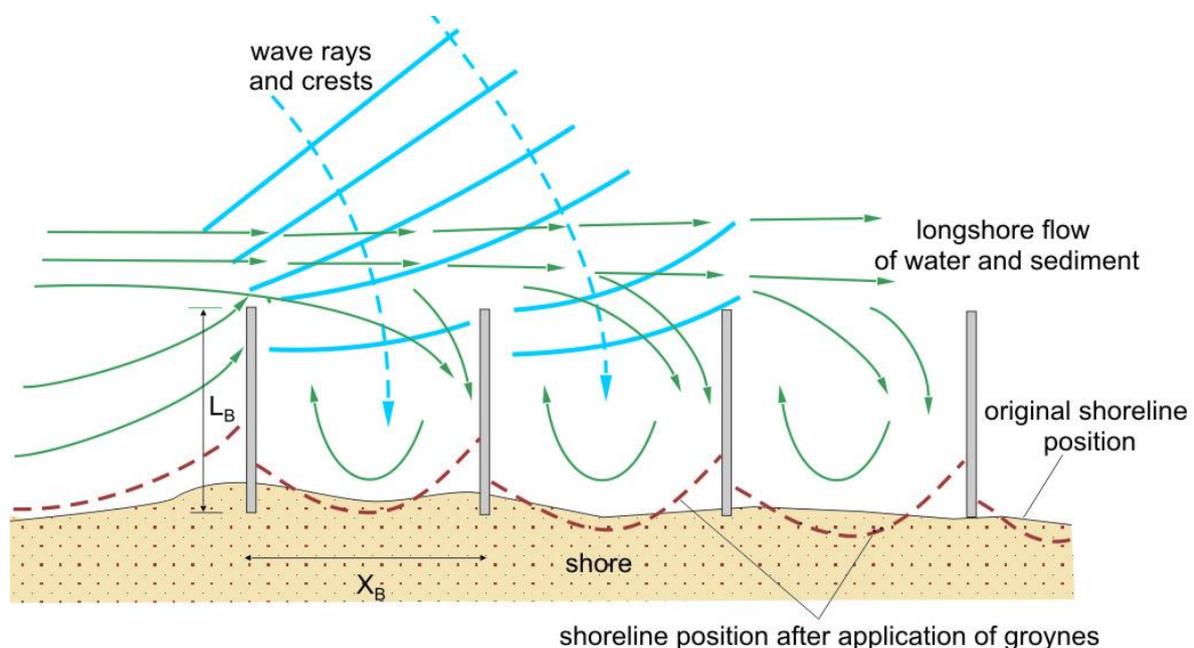


Figure 13 : Scheme of interaction of groynes, waves, currents and shore

➤ **Features of groynes**

Appropriate choice of shapes, dimensions and location of groynes is crucial for the effectiveness of shore protection. Groyne length is usually related to the mean width of the surf zone and to the longshore spacing in the groyne field. The active length of the groyne increases with increasing wave incidence angle. Groynes are most effective if they do not trap the whole longshore sediment flux. Numerous investigations and observations suggest that the seaward extension of groynes should not exceed 40-50% of the storm surf zone width. The effectiveness of groynes also depends on their permeability. Groynes which are either structurally permeable or submerged (permanently or during high water levels) allow more sediment to pass alongshore, in comparison to impermeable or high groynes^[2].

The height of groynes influences the amount of longshore sediment transport trapped by the groynes. The same groyne can act either as emerged or submerged structure (Figure14 a), depending on water level changes due to tides and storm surges. Generally, groynes are designed to stick out about $h_s=0.5-1.0$ m above mean sea level (MSL). Groynes that are too high cause wave reflection, resulting in local scouring. Considering the shape in plan view, the groynes can be straight, bent or curved, as well as L-shaped, T-shaped or Y-shaped. The most popular shapes and types of groynes are schematically shown in (Figure14).

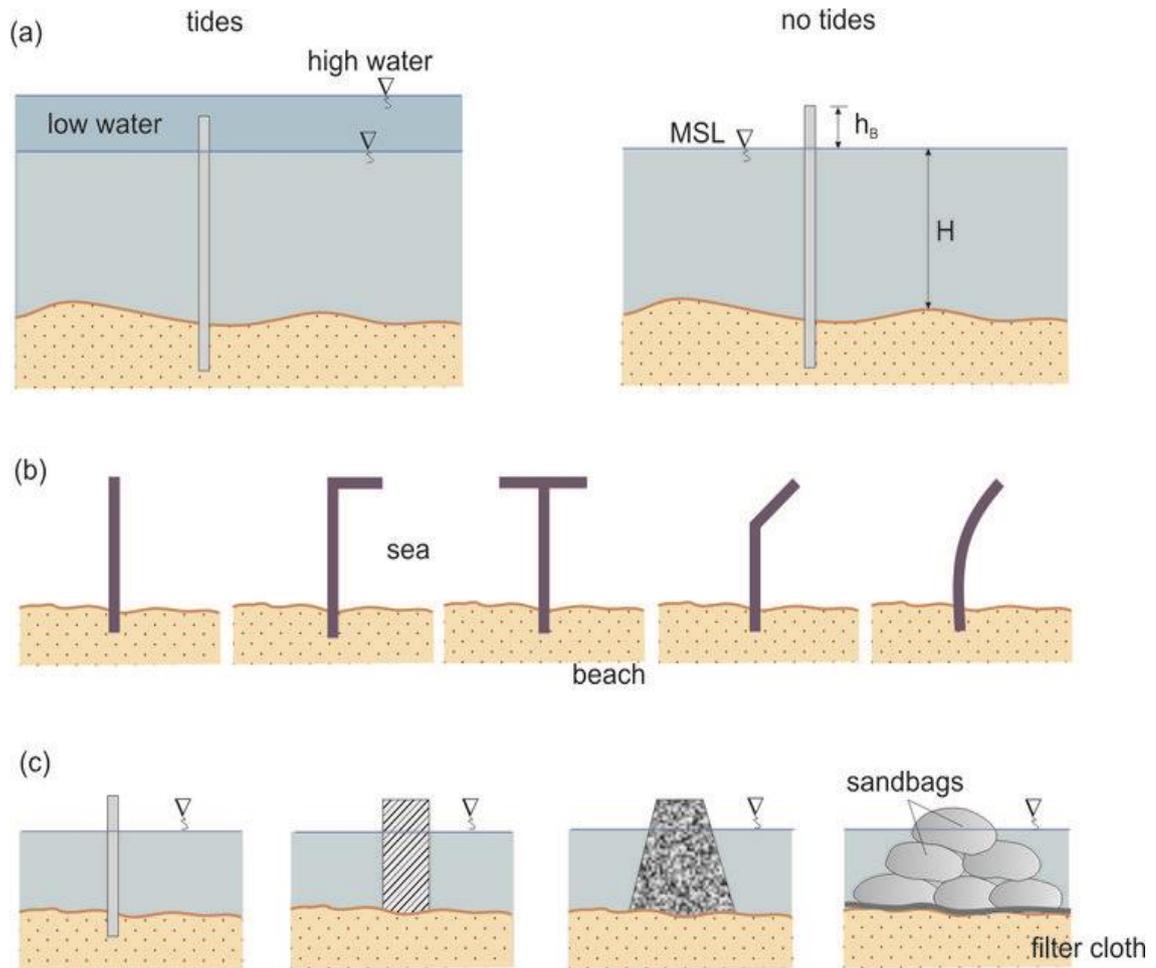


Figure 14 Types and shapes of groynes

➤ Advantage :

1. Groynes are easy to construct.
2. They have long term durability and are low maintenance.
3. They reduce the need for the beach to be maintained through beach nourishment and the recycling of sand.

➤ Disadvantage

1. Wooden groynes are less durable than rock groynes.
2. They can have a negative, visual effect on the landscape.
3. Groynes prevent sediment being transported to beaches further down the coast and therefore increase the amount of erosion and sediment loss at those beaches.
4. The down drift erosion caused by the groynes may cause the need for regular maintenance and beach nourishment on the downstream side.

• Methodology

Experimental Setup

(1) Model channel and structures

The experiments are performed in a tiltable open-channel flume located in the Hydraulic Engineering Laboratory of Nagoya University. The flume is straight and of rectangular cross-section, 20.0 m long, 0.5 m wide, 0.3 m deep and is capable of a discharge not exceeding 50.0 m³ /hr. The side walls of the flume are made of a transparent weather-resistant acrylic sheet, thereby allowing visualization of the flow and the scour process during an experimental run. Its bed at both upstream and downstream regions is made rigid with wooden planks, and extended by 5.5 m and 4.5 m from the inlet tank and discharge tank, respectively. Relatively fine and uniform sands with a median size $d_{50} = 0.13$ mm covered the remaining area of the channel with a thickness of 16 cm. Four different model-structures are considered in this study varying both alignment and permeability, where one of them is impermeable and other three are

combined. First model (M1) is straight impermeable; second one (M2) is also straight, but first one-third portion is impermeable and rest part is made permeable with round sticks, and permeability is varied along the length changing blockage percentage from 67% near impermeable part to 50% at far-end, i.e., first-half of permeable portion is of 67% blockage and rest portion is of 50%. First one-third part of third model (M3) is perpendicular to the side wall and later part is aligned towards 200 downstream, i.e., 700 to the direction of flow at upstream; permeability is similar to M2. Fourth one (M4) is of same alignment as in M3, except that permeability of downstream-aligned part is varied vertically: upper portion is blocked and lower portion is kept open, i.e., bandal-structure, such that its projected area is similar to other combined model structures (M2 and M3). The projected length of all groyne models (L_g) is 18.0 cm. A set of six numbers of each model-structure are placed on right side of the channel perpendicular to the side, as the groynes should preferably be installed in a series to protect a certain reach of a bank of a wide alluvial river, also to favour in formation of navigation channel. Figs. 15 (a-c) depict a schematic representation of experiment setup including side view and top view of model channel, top view of groyne models, and channel cross-section, respectively. The center of the first structure is at 10.0 m away from the inlet boundary, which is theoretically sufficient to achieve a fully developed turbulent flow in control region. The model structures are installed with an interval $S_g = 0.55$ m, i.e., aspect ratio $S_g/L_g \approx 3.0$ and cover the total distance 2.75 m by five embayments. The x-axis is the downstream direction with $x = 0$ at center of the first groyne; y-axis is pointing towards the left side in the transverse direction with $y = 0$ at the right-side where the groynes are placed; and z starts from the initial loose bed-level with upward positive. The velocity components u and v are corresponding to their directions x and y , respectively.

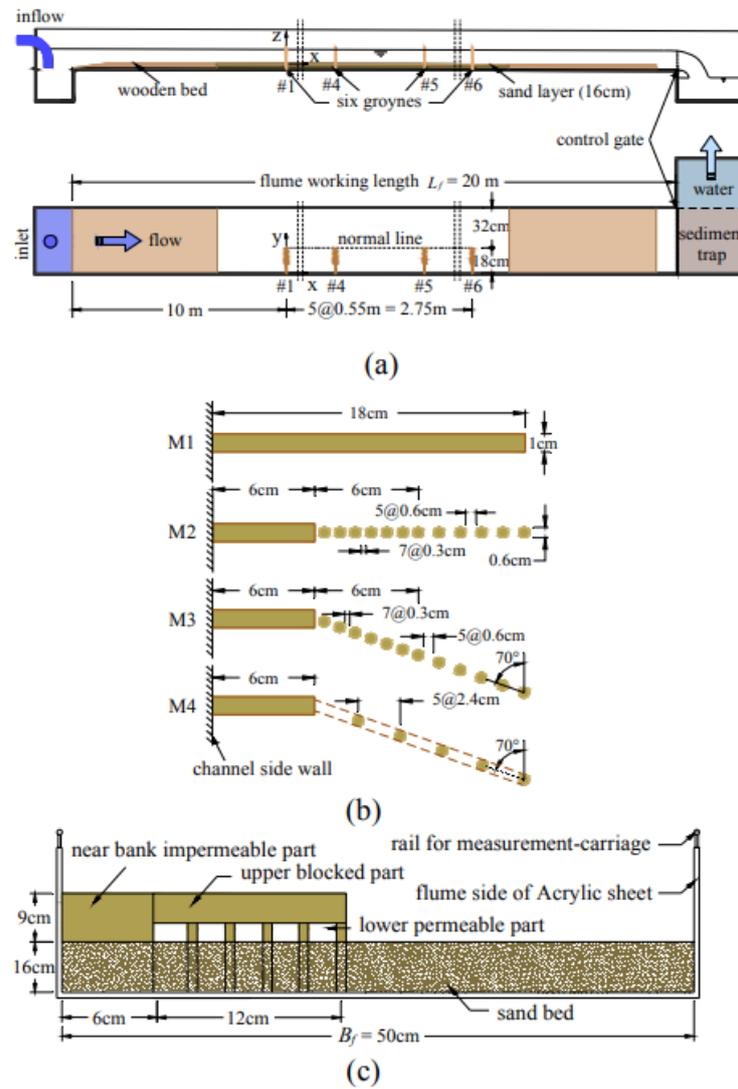


Fig. 15 Experimental setup: (a) side (top) and plan view (bottom) of model channel; (b) groyne models (plan view); and (c) flume cross-section with modified bandal-structure.

(2) Experimental conditions

The flow condition in the channel is adjusted by a control valve and a tail gate so that a bed shear velocity (u^*) does not exceed the critical shear velocity for initiation of motion of the bed sediment (u^*_c) for the approach flow to avoid bed-forms at upstream of the control reach. This has been decided after some trials such that except control sections, the channel bed has been remained unchanged, i.e., the condition of clear water scour. Flow uniformity is verified by comparing the free-surface slope and the flume's bed slope. Two different flow discharges and approach depths are maintained for two types of groynes: impermeable and permeable to establish similar mean velocity in the control region considering blockage area of the structures. In all tests, the groynes are emerged and the Froude number ($Fr = U \sqrt{gh}$) is small enough to ensure sub-critical flow and the Reynolds number ($Re = Uh/\nu$) is high enough to ensure fully developed turbulent flow in the control section. The details of the tests undertaken, including the hydraulic and sediment transport conditions are presented in Table 1.

Parameters	Groyne type	
	Impermeable	Combined
Flow Q (m ³ /hr)	12.5	16.5
Flow depth h (cm)	5.0	5.5
Mean velocity U (cm/s)	13.9	16.7
Sediment size d_{50} (mm)	0.13	0.13
u^*/u^*_c	0.88	0.92
Froude number Fr	0.20	0.23
Reynolds number Re	6944	9167

Procedure

Before starting the flow in the flume, after placing one set of model structures on one side, the loose bed surface of fine sediment in the working area is leveled with a scraper wooden plate mounted on a moving carriage, which can ride over the steel frames on both sides of the channel. After that, the flow is allowed to enter gently in the flume; when the bed is completely wetted, then it is drained and a profile of this bed surface is collected as an initial bed. The flume is then filled slowly with water and the specific flow in consideration of clear-water scour as defined in the previous section is allowed to run. A control gate at the end of the flume is adjusted along with bed slope while allowing final flow to run to ensure uniform subcritical flow and clear-water scour condition. Then, the change of bed topography, especially the depth of local scour near the first structure is monitored by a CMOS (complementary metal-oxide semiconductor) laser sensor (a sensor head IL-300 with an amplifier unit IL-1000, KEYENCE Corp.) to identify the equilibrium condition when the rate of change decreases considerably. Then all the measurements, such as flow depth, velocity fields, final bed topographies, and so on, are collected along some selected sections. Measured data are then analyzed to extract some typical features to recognize the modification of fluvial responses. To determine the performance of groyne structures, three typical features are investigated critically: depth of scour near groynes (ΔZ_g), deposition of sediment in the groyne field (ΔZ_{gf}), and erosion in the main channel (ΔZ_{ch}) (Fig. 2), where the first one signifies the stability of the groyne-structures, the second one the protection of bank from erosion, and the considered 9.0 hrs in the tests. One test case is, however, conducted first for 18.0 hrs to recognize this time length, after which the change in bed level is found insignificant.

Velocity Fields Two-dimensional velocity components are collected with an electromagnetic velocimeter (VM-602HT, KENEK Co.,LTD.) under dynamic flow conditions utilizing I-shape sensor, which is attached to a moveable platform. The measuring devices recorded a signal in x and y-directions simultaneously, which later converted into velocities in cm/s. Three measurements are taken at each point to have average value, and the area between first and second groynes is chosen for the measurements to inspect the modification of flow patterns by the individual structure after coming the flow from uninterrupted area. To grasp the velocity fields rightly, these measurements are taken along 9 transverse transects, from 2.5 cm upstream of first groyne to 2.5 cm upstream of the subsequent groyne, and 16 longitudinal transects with 3.0 cm intervals starting at 2.5 cm from the side. The measurements are made at approximately 60% of the water depth, measured from the water surface. It is assumed that the magnitude of the velocity at this depth equals the magnitude of the depth-averaged velocity. The locations of the measuring sections and points are shown in Fig16 .

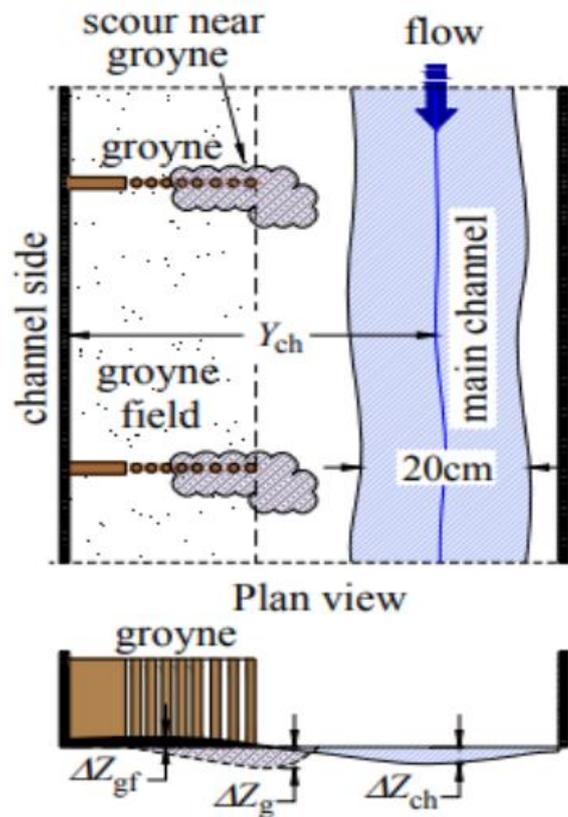


Fig. 16 Definition sketch of key features of groynes to evaluate performance.

Velocity Fields

Two-dimensional velocity components are collected with an electromagnetic velocimeter (VM-602HT, KENEK Co.,LTD.) under dynamic flow conditions utilizing I-shape sensor, which is attached to a moveable platform. The measuring devices recorded a signal in x and y-directions simultaneously, which later converted into velocities in cm/s. Three measurements are taken at each point to have average value, and the area between first and second groynes is chosen for the measurements to inspect the modification of flow patterns by the individual structure after coming the flow from uninterrupted area. To grasp the velocity fields rightly, these measurements are taken along 9 transverse transects, from 2.5 cm upstream of first groyne to 2.5 cm upstream of the

subsequent groyne, and 16 longitudinal transects with 3.0 cm intervals starting at 2.5 cm from the side. The measurements are made at approximately 60% of the water depth, measured from the water surface. It is assumed that the magnitude of the velocity at this depth equals the magnitude of the depth-averaged velocity. The locations of the measuring sections and points are shown in Fig. 17 .

third one the maintenance of navigation channel, respectively. Here, the values of the parameters for erosion in main channel and deposition in groyne field are averaged over the area between second and fifth groynes for combined case, and second and fourth groynes for impermeable case, to avoid the effect of reflected flow. However, local scour is the maximum scour depth near the first groyne.

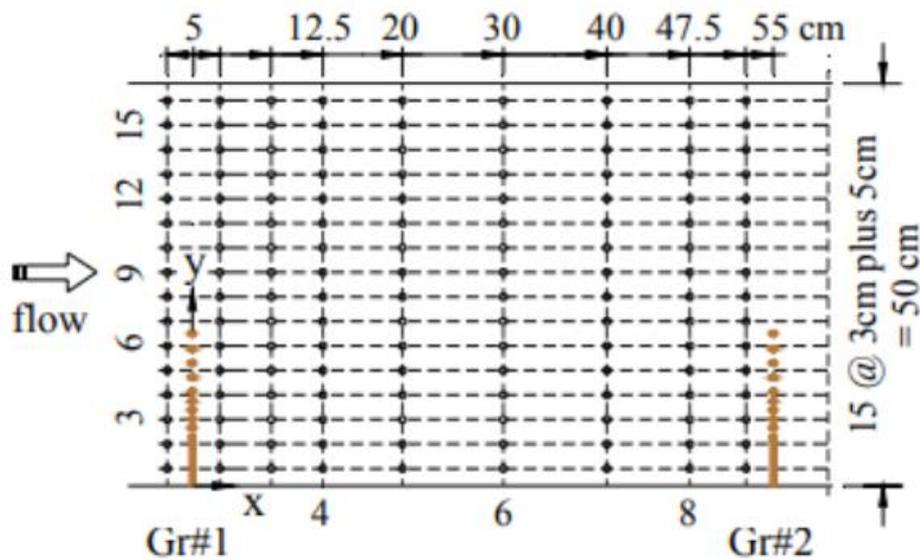


Fig. 17 Measuring points and sections for velocity measurements.

Bed Levels

After the velocity measurements, the flow is gradually decreased in such a way as to cause minimal disturbance to the bed. The channel is drained and after the bed is dry, typically after one day of the run, the elevation of the bed is measured in the control area using a computer aided laser sensor. Bed levels are measured in all the groyne area along 18 longitudinal transects with 2.5 cm intervals. Three sensors are attached to a moving carriage to cover three transects at each sweep that travels over a steel frame on both sides of the channel.

Measurements

Bed level measurements are taken in the test area before the start of each test for reference and at the end of the tests, respectively; velocity measurements are taken once in every test case at equilibrium state of flow. After continuous running the flow, when the channel bed seemed to be unchanged, then that state can be assumed to be reached equilibrium state and its distributions and bed topographies measured with available setup in the selected sections are presented in this section to understand the modification of flow patterns and to explore all the features influenced by the structures, respectively.

Analyses of Data

As the main two purposes of installing groynes are bank protection through deposition of fine sediment near the bank and maintenance of thalweg for navigation channel accompanying with structural safety, three typical features such as scour depth near groynes, height of deposition of sediment in the groyne field and depth of erosion in the main channel, are considered to confirm the performance of groynes. Velocity distributions and bed topographies measured

with available setup in the selected sections are presented in this section to understand the modification of flow patterns and to explore all the features influenced by the structures, respectively.

Flow Fields

Fig. 4 depicts the transverse distributions of streamwise velocities non-dimensionalized by mean velocity in impermeable case (U_{imp}) from the four models at 7.5 cm downstream of first structure to compare the flow patterns affected by various groynes. From the average trend of transverse distributions of streamwise velocity for combined groynes, it can be recognized that velocity reduces gradually towards the channel boundary the groynes installed, not sudden reduction at the end of the structure, or at the end of the impermeable part, what impermeable structures do leaving strong eddies. This modification of flow-patterns can be attributed to the permeable components of the structures and gradual reduction of permeability along the length of groynes towards the side wall. Depth-averaged flow fields in the first groyne area influenced by the model structures are presented in Fig. 5(a). It can be seen here that the magnitude of velocity vectors in the groyne field near bank for combined groynes (M2, M3, M4) are appreciably decreased and no strong recirculation of flow be marked except a smaller one from M4 behind the impermeable portion, as compared to the case of impermeable groyne (M1). These return currents, if groynes are not closely spaced, are sometimes dangerous at high flood time to cause scour near bank and hence bank recession, rather than forming sustainable riverine landscape. However, this inherently causes strong eddies and hence huge scour near groyne-tip to hamper stability of the structure itself; as evident in Jamuna, several failures of RCC spurs due to separation of flow are reported (14).

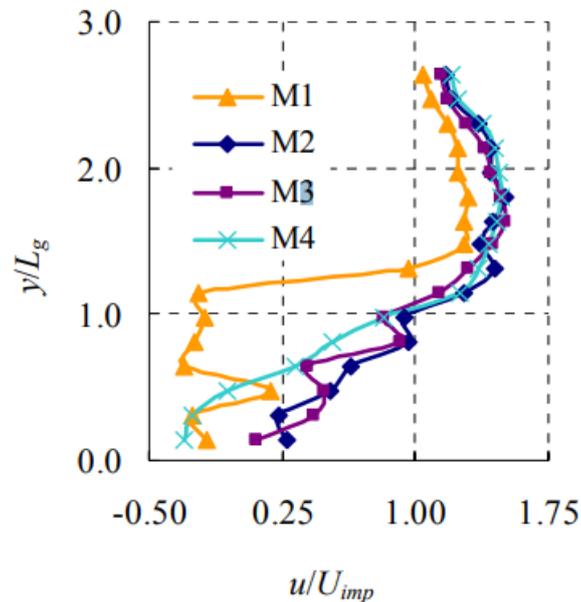


Fig. 18 Depth-averaged streamwise velocity (dimensionless) distributions across the channel at 7.5 cm downstream of first structure

Bed Topographies

The important key features to evaluate the performance of groynes such as: scour near groynes, deposition in the groyne field, and erosion in the main channel induced by the structures can be extracted from the bed topographies depicted in Fig. 19 (b), where (relatively) higher impact near the first structure causing deeper scour as well as higher erosion in the channel bed can be marked. Dimensionless transverse distributions of erosion and deposition averaged over the area between second and fourth groynes for impermeable case and second and fifth groynes for combined case are shown in Fig. 20 , to recognize the influence of various structures in the main channel and groyne field, respectively. Here, depth of flow in impermeable case (h_{imp}) is considered to make the parameters dimensionless. In averaging the feature values different distances are considered here, as the

downstream embayments are affected by the reflected flow from the opposite wall in the case of impermeable structures. As the flow velocity decreases significantly in the embayments, sediment settles there with different mechanisms of material transports for impermeable and combined groynes, respectively. Channel ripples of various dimensions are observed in the control area with larger dimension in the main channel and smaller extent in the groyne field, not in the upstream part of the area. As local scour around the first groyne was significantly more pronounced, so this can be explained from the fact that the first groyne is exposed to the strongest current, which results in an increased erosion rate. However, in impermeable case, the flow is highly diverted, so that it is reflected from the opposite wall of the channel and turned back to attack the downstream embayments causing much scour near groynes there. It is surprising to notice here that the impact by the back flow can even be higher than that occurred near the first structure, depending on the intensity of oblique flow. In the region behind the last groyne, as the channel becomes wider, consequently, deposition took place due to the decreased velocity.

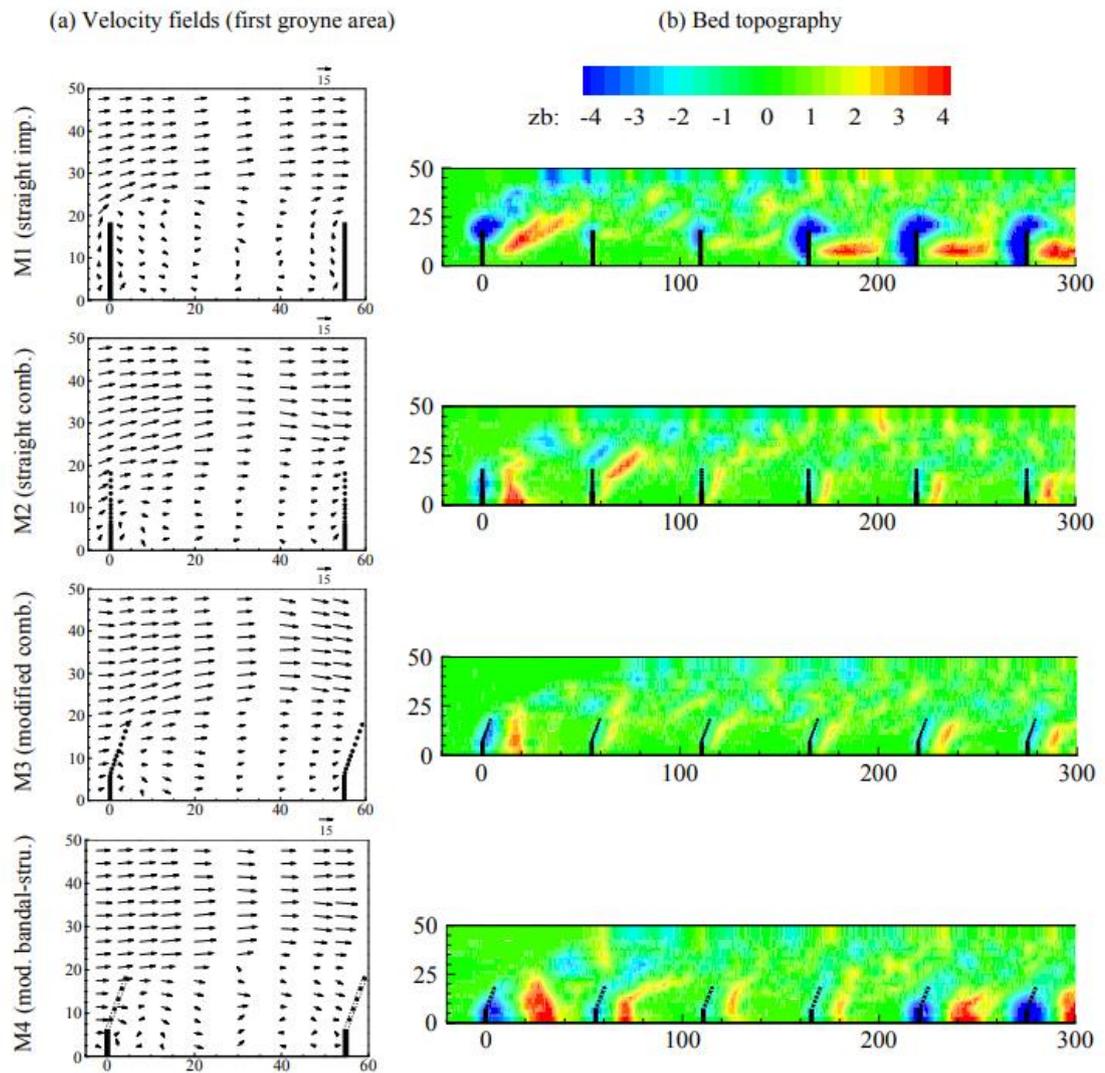


Fig. 19

(a) Velocity fields and
(b) bed topographies from various model-structures (here, all units are in
cm, except velocity vectors in cm/sec)

Performance of Model-Structures

The performance of a groyne is evaluated through three key features: scour near the groyne, deposition in the groyne field, and erosion in the main channel; where the first one signifies the stability of the structure, the second one the anti-erosion of bank, and the third one the maintenance of navigation depth in the main channel. The measured maximum scour depth near the first groyne, average deposition in the groyne field, and average erosion in the channel bed from 25 cm to 45 cm from the side wall where the groynes are placed, are summarized and depicted with a figure, Fig. 20 for clear understanding of the variation of the features among various groynes. The area considered for finding average feature values of erosion and deposition is similar to their transverse distributions as described Section 4.2, to avoid the effect of back flow from opposite wall in case of impermeable structure. Here better responses in the channel in respect of local scour can be recognized due to both alignments and permeability: local scour reduces from M1 to M2 and also from M2 to M3. The results are also consistent with other studies 15). Sediment deposition in the groyne field can be seen higher for models M4, and then M2 and M3, and it is found minimum in the case of model M1; whereas, average erosion in the channel bed is found higher in case of models M4, M1 and then M3, and it is observed relatively regular for M3 and M4 [Fig. 19 (b)]. Moreover, as seen in Fig. 19(b) in impermeable case, flow was reflected from the other side of flume and attacked the groynes in downstream area, where pronounced scour is observed. It could be possible by strong return currents from fully blocked impermeable structures depending on groyne intervals, or reflecting the flow from large sandbars or any hard strata on channel boundaries on opposite side, or following the deeper channel near structures as recognized the failure of Betil and Enayetpur spurs several times in Bangladesh due to obliquely

striking flow 8), 16). It can be seen from Fig. 19 (a) that flow beneath the upper impermeable portion of model M4 counterbalances the recirculation of flow and causes bed formation in the downstream area; this is also evident from the field data 16). Diversion of flow is made by the straight impermeable and inclined upper-blocked portion of the structure which favors deepening the channel bed; whereas, only sediment-laden water near the bed passes beneath the blocked portion and deposited in the groyne field. However, compared to the model M3 scour depth and scour area both are found in higher in case of model M4, this may due to the formation of vortices induced by downward flow to pass through lower open part 17); in contrast, height of deposition in the groyne field and erosion in the channel bed both are found higher in the case of model M4 compared with other structures. Therefore, from the experimental results, though M4 is advantageous in respect of anti-erosion of bank and maintenance of navigation channel, structural safety may have to be sacrificed or much attention should be paid for that at high flow condition. In addition, it is difficult to maintain certain area-ratio between upper impermeable and lower permeable portions for better functioning, as water level varies highly in the river, especially in Jamuna over the annual hydrological cycle. Even if bankfull stage, say, is considered in consideration of bank protection from erosion 8), this may not function properly to address low flow problem due to less diversion of flow by lower highly permeable portion. As the erosion in channel bed in the case of model M3 is significantly improved than M2 and relatively uniform due to its modified configurations, so introducing the modification in the groyne design, which minimizes both local scour and big diversion of flow, does not have to compromise the quality of waterway or stability of river bank.

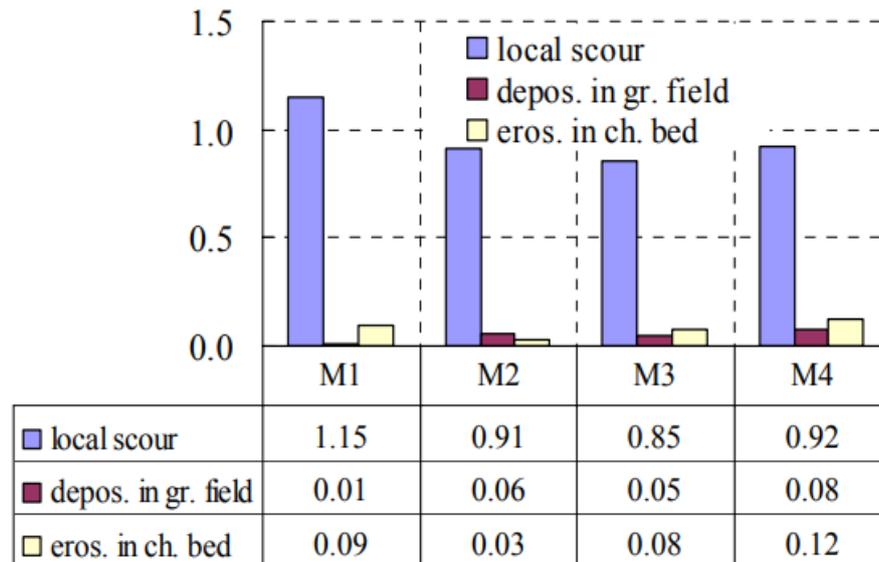


Fig. 7 Comparison of dimensionless features between groyne-models: local scour ($\Delta Z_g/h_{imp}$), deposition in groyne field ($\Delta Z_{gf}/h_{imp}$), erosion in channel bed ($\Delta Z_{ch}/h_{imp}$).

Conclusions

The present study was mainly aimed at exploring fluvial responses from various configurations of groynes to identify a suitable design for lowland river problems. From the discussion in the aforementioned section, the following conclusions can be drawn:

(1) Intense separation of flow occurred in the case of fully blocked impermeable model M1, consequently caused higher scour near groyne-tip. Also the flow was highly diverted to hit the other wall and turned back to attack the downstream embayments.

(2) Due to permeable nature, model M2 allowed flow through them, so that flow separation was minimized; moreover, velocity was reduced gradually and

local scour was minimized. However, erosion in the main channel was not regular; rather deposition occurred after third groyne area.

(3) Model M3, modified in configuration with both alignment and permeability favored much lower local scour to occur than all other models; also deposition in the groyne field as well as erosion in the main channel were relatively uniform, but moderate in magnitude.

(4) Scour near model M4 was found higher in area and magnitude both in comparison to model M2 and M3; however, two other important features: erosion and deposition are better responded by the straight impermeable and inclined upper blocked portions for water diversion and lower open portion for allowing sediment laden water. Therefore, the modified combined structures (M2, M3 and M4) offer more gradual transition from main channel to bankline compared with the conventional impermeable ones, thus these bear a high importance for the quality of landscape. Besides, as these structures minimize scour near groynes and strong return currents, aspect ratio could be increased, thus a cost-effective design approach can be expected. The features explored from the laboratory investigations imply that further modification in the lower permeable portion in M4 can be made with the arrangements for permeability in M3, so that the modified structure can serve optimal function both at high flow and low flow condition for lowland river problems; however, it needs detailed investigations for better understanding of the fluvial processes.

Acknowledgements

The authors gratefully acknowledge the financial support of MEXT, Japan in the present study. They also thank to Mr. Yoshimoto and Mr. Ma, graduate students, respectively, the Hydraulic Engineering laboratory of Nagoya University for their assistance during experimental works.

• References

1. [Jump up](#) Nordstrom, K.F. 2014. Living with shore protection structures: A review. *Estuarine, Coastal and Shelf Science* 150: 11-23
2. [Jump up](#) Pilarczyk K. & R.B. Zeidler.(1996): Offshore Breakwaters and Shore Evolution Control. "Balkema", the Netherlands pp560.
3. [Coleman](#), J.M., Brahmaputra River: channel processes and sedimentation. *Sedim. Geol.*, 3, 129-239, 1969.
4. [Elahi](#), K.M., Ahmed, Q.S. and Mafizuddin, M. (eds.), Riverbank erosion, flood and population displacement in Bangladesh. Riverbank Erosion Impact Study, Jahangirnagar Univ., Savar, Dhaka, 1991.
5. [Bristow](#), C.S., Sedimentary structures in bar tops in the Brahmaputra River, Bangladesh. In: Braided Rivers (Ed. By J.L. Best and C.S. Bristow), *Spec. Pub. Geol. Soc.*, 75, 277-289, 1993.
6. [Thorne](#), C.R., Russell, A.P.G. and Alam, M.K., Planform pattern and channel evolution of the Brahmaputra River, Bangladesh. In: Braided Rivers (Ed. by J.L. Best and C.S. Bristow), *Spec. Publ. Geol. Soc.*, 75, 257-276, 1993.
7. [Zhou](#), W. and Chen, J., River morphology and channel stabilization of the Brahmaputra River in Bangladesh. *Int. J. Sediment Res.*, Vol. 13, No.4, p.44-58, 1998.)
8. [Klaassen](#), G.J., Douben, K. and van der Waal, M., Novel approaches in river engineering. *River Flow 2002* (eds., Bousmar and Zech), pp.27-43, 2002.
9. [Rahman](#), M.M., Nakagawa, H., Khaleduzzaman, A.T.M., Ishigaki, T. and Muto, Y., On the formation of stable river course. *Annu. of Disas. Prev. Res. Inst., Kyoto Univ.*, No. 47 B, 2004. Mosselman, E., Bank protection and river training along the braided Brahmaputra-Jamuna River, Bangladesh. Braided Rivers (eds., Smith, Best, Bristow and Petts), Blackwell Publishing, pp.270-281, 2005.
10. [Ishii](#), C., Asada, H. and Kishi, T., Shape of separation region formed behind a groyne of non-overflow type in rivers. XX IAHR Congress, Moscow, USSR, 405-412, 1983.
11. [Klingeman](#), P.C., Kehe, S.M., and Owusu, Y.A., Streambank erosion protection and channel scour manipulation using rockfill dikes and gabions. Rep. No. WRRRI-98, Water Resources Research Institute, Oregon State Univ., Corvallis, Ore., 1984.
12. [Chen](#), F. Y., Ikeda, S., Horizontal separation in shallow open channels with spur dikes. *J. Hydroscience and Hydraul. Eng.*, 15(2), pp.15-30, 1997. 12)Sharmin, R., Rahman, M.M., Martin, A., Haque, E., Hossain, I. and Razzak, A., Effectiveness of bandalling and dredging for the maintenance of navigation channel in the Jamuna River. *Int. Conf. on Water & Flood Management*, March 12-14, Dhaka, Bangladesh, pp.125-133, 2007.
13. [Alauddin](#), M. and Tsujimoto, T., Optimum design of groynes for stabilization of lowland rivers. *Annu. J. Hydraul. Eng., JSCE*, Vol.55, pp.145-150, 2011.
14. [Uddin](#), M.J., RCC spurs in Bangladesh: Review of design, construction and performance, MSc Thesis, UNESCO-IHE, The Netherlands, 2007.
15. [Kang](#), J.G., Yeo, H.K., Kim, S.J. and Ji, U., Experimental investigation on the local scour characteristics around groynes using a hydraulic model. *Water and Env. J.*, Vol. 25(2), pp. 181-181, 2011.
16. [Nazim Uddin M.](#), Hoque. M. M. and Rahman, M. M., Flow Field Around Bank Protection Structures Along the Jamuna River. 17th congress IAHR APD 2010, Paper no 3d043, 21st to 24th February, Auckland, New Zealand, 2010.
17. [Zhang](#), H., Nakagawa, H., Baba, Y., Kawaike, K. and Teraguchi, H., Three-dimensional flow around bandal-like structures. *Annu. J. Hydraul. Eng., JSCE*, vol. 54, pp.175-180, 2010.